


GUIDE TO CLEANING TANKS AND BOOMS

TANKS WITH **NO** INTERNAL SPRINKLERS/CLEANING SYSTEMS

IMMEDIATELY AFTER SPRAYING

DO THIS...

Wash outside of tank with All Clear DS solution at the rate of 250 mL per 100 L water.

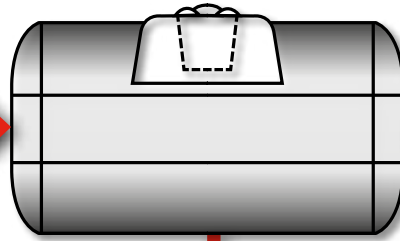

AND THIS

Rinse or pressure clean the inside of all equipment with at least 1/10 of tank capacity of clean water. Visible residues should be removed from tank, then boom, lines and nozzles flushed. Drain all equipment completely.

...AND THEN FOLLOW THESE STEPS.

Half fill the tank with clean water and add All Clear DS at the rate of 250 mL per 100 L of tank capacity. Start the pump with full agitation and mix well. Flush the All Clear DS solution through the entire system, ensuring that boom end valves are open and/or bungs removed for a complete boom treatment.

Close boom end valves and/or replace bungs once All Clear DS solution is freely flowing from the ends of the booms. Top up the tank until filled with clean water and allow to stand for 15 minutes with the agitation running. Flush all of the solution out of the spray tank via the spray boom and lines.

Nozzles, screens, filters and non-drip diaphragms etc. should be removed and washed separately with All Clear DS solution at the rate of 25 mL in 10 L of water.

Drain tank and flush the entire system with clean water.

DON'T FORGET...

- The entire spraying and chemical transfer system ("entire system") includes but is not limited to venturi style hoppers, pre-mix tanks, transfer systems, suction hoses, filters, tanks, tank lids, flush tanks, strainer baskets, valves, diaphragms, booms, spray lines and nozzles. These should all be cleaned with All Clear DS.
- If the tank cleaning history is unknown or may have been compromised, it is necessary to soak all internal surfaces, lines, filters and nozzles for 24 hours in All Clear DS solution at the 250 mL rate above.
- For extra sticky combinations such as, but not limited to, carfentrazone-ethyl plus glyphosate or Valor[†] plus glyphosate, allow the cleaning solution to be in contact with all internal surfaces of the spray equipment for at least 24 hours.
- A susceptible plant should be treated with a sample of the final rinsate to determine whether residues remain. If residues remain, repeat the cleaning process.
- All hoses should be inspected annually for both external and internal damage and cracking. The internal surfaces of old or perished hoses will hold significant levels of pesticide residues, and so these hoses should be replaced immediately.

The information provided herein may include extracts from the product label and does not constitute the complete directions for use.

READ THE PRODUCT LABEL THOROUGHLY BEFORE OPENING OR USING ALL CLEAR

AgNova Technologies Pty Ltd
ABN 70 097 705 158
PO Box 2069 Box Hill North
Victoria 3129 Australia
Ph 03 9899 8100

Data referred to herein were generated using products and rates that were registered at the time. Always read and follow product labels. AgNova Technologies Pty Ltd shall not be liable for any consequential or other loss or damage relating to the supply or subsequent handling or use of this product, unless such liability by law cannot be lawfully excluded or limited. All warranties, conditions or rights implied by statute or other law which may be lawfully excluded are so excluded. Where the liability of AgNova Technologies Pty Ltd for breach of any such statutory warranties and conditions cannot be lawfully excluded but may be limited to it re-supplying the product or an equivalent product or the cost of a product or an equivalent product, then the liability of AgNova Technologies Pty Ltd for any breach of such statutory warranty or condition is so limited.

© Copyright AgNova Technologies 2019. ALCFLW191023

© All Clear is a registered trademark of AgNova Technologies Pty Ltd.

† Valor is a registered trademark.